

Must read this before using cartridges

Air vent plug must be removed from all the cartridges.



(Ink can not come out of the cartridge if the air vent plug is not removed)

Cartridges will only work as a set. Do not mix refillable cartridges with Epson cartridges or any other cartridges.

If error has come up on you printer saying cartridges are missing; press the ink button (or the ok button on some printers) and then remove all the cartridges. Wait 30 seconds and then put the cartridges back into the printer. Make sure to press down firmly to ensure cartridges are in all the way.

Do not mix ink from different manufactures. Mixing ink may cause ink to clog in your printer.

Last Plug of the cartridge must stay removed as an air vent

Do not remove the plug in the middle of the cartridge

Cartridges will only work as a set. Do not mix them with Epson cartridges

Bring cartridge over to the sink to refill




Fill syringe with 4ml of the correct color of ink needed




Remove last plug (last plug is Air vent and fill hole)



Insert syringe into cartridge, gently but, firmly

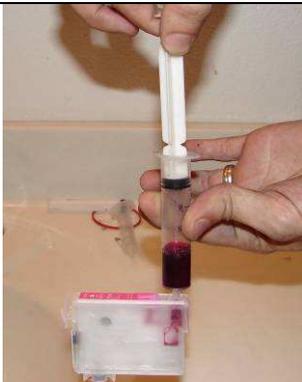

Do not press down do not try to inject ink. Instead, hold syringe with one hand pull handle up until it reads at 10ml. This draws the air out of the cartridge and creates a vacuum.

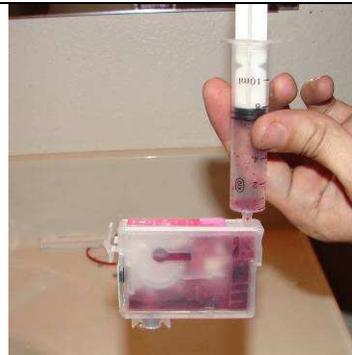

Simply let go of the handle and the vacuum you created will draw the ink into the cartridge. If there is any ink left in the syringe pull back to 10ml and repeat the vacuum step again. Again **DO NOT PRESS DOWN ON THE HANDLE OR TRY TO INJECT THE INK!**

REPEAT Refill syringe 2 more times do not overfill the cartridge it needs 10% air to function correctly. Rinse syringe with water after every filling.